

GKS 079

Short-Stroke Test Probe

Grid:





≥ 1,27 mm

≥ 50 Mil

Installation height with KS: 3,2 mm (.126)

Recommended stroke: 1,0 mm (.039)

Mounting and functional dimensions

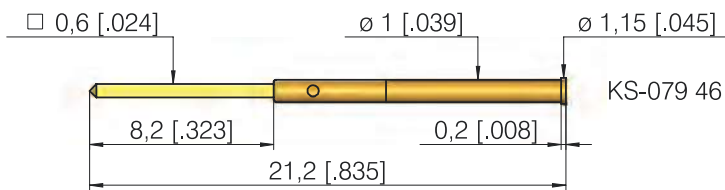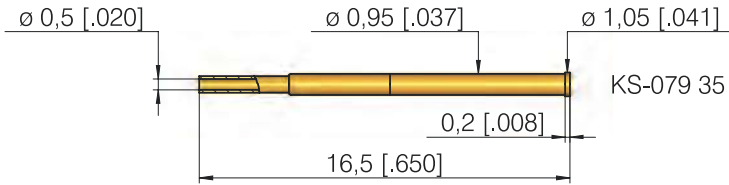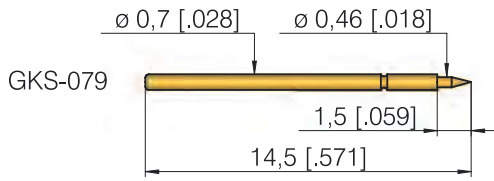

Collar height and installation height
The installation height with KS-079 is: 3,2 mm (.126)

Available tip styles

Material	Tip style	Plating	Further versions	
			∅	∅ (inch)
3	01	A	∅ 0,50 (.020)	

Mechanical data

Working stroke: 1,0 mm (.039)
Maximum stroke: 1,2 mm (.047)
Spring force at work. stroke: 1,3 N (4.7oz)

Materials

Plunger: BeCu, gold-plated
Barrel: Bronze, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Note:

The KS-079 is available pre-wired with 1 m wire AWG 26 (see ordering example). Recommended minimal bending radius: 10 mm (.394).

Electrical data

Current rating: 3 A
R_i typical: < 20 mΩ

Mounting hole size

KS-079 35
in CEM1 and FR4: ∅ 0,94 - 0,95 mm (.0370 - .0374)
KS-079 46
in CEM1 and FR4: ∅ 1,01 - 1,02 mm (.0400 - .0400)

Operating temperature

Standard: -40° up to +80° C

Ordering example

Series	Tip material 3 = BeCu	Tip style	Tip diameter (1/100 mm)	Plating A = Gold	Spring force (dN)	Collar height (mm)
--------	--------------------------	-----------	----------------------------	---------------------	----------------------	-----------------------

Test probe:

G K S 0 7 9 3 0 1 0 5 0 A 1 3 0 0

Receptacle:

K S - 0 7 9 3 5

Receptacle with wire-wrap:

K S - 0 7 9 4 6

Receptacle, pre-wired with AWG 26:

K S - 0 7 9 3 5 V - 2 6