

# Mounting and functional dimensions

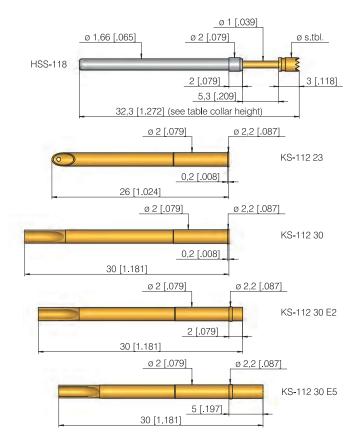

Collar height	02	03	04	05	06	07	08	09	10
Total length (mm)	32,3	33,3	34,3	35,3	36,3	37,3	38,3	39,3	40,3
Installation height without receptacle (mm)	10,3	11,3	12,3	13,3	14,3	15,3	16,3	17,3	18,3

Grid: ≥ 2,54 mm ≥ 100 Mil Installation height with KS: 10,5 resp. 18,5 mm (.413/ .728) Recommended stroke: 4,0 mm (.157)

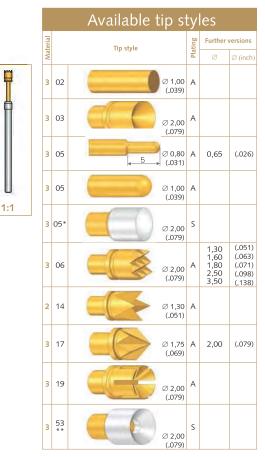

pressed-on silver head

\* \* pressed on silver head, tip length 3,5 mm ( 138) installation height plus 0,5 mm (.020)

Collar height	02	03	04	05	06	07	08	09	1
Total length (mm)	32,3	33,3	34,3	35,3	36,3	37,3	38,3	39,3	4(
Installation height without receptacle (mm)	10,3	11,3	12,3	13,3	14,3	15,3	16,3	17,3	18

#### Compatible GKS

GKS-112 (assembled in same receptacle)

Materials	
Plunger:	BeCu or steel, gold-plated
Barrel:	Brass, silver-plated
Spring:	Stainless steel, gold-plated
Receptacle:	Brass, gold-plated
•	0


**Operating temperature** Standard: -100° up to +200° C


#### Mounting hole size

for KS-112 xx in CEM1: Ø 1,98 - 2,00 mm (.0780 - .0787) in FR4: Ø 1,99 - 2,01 mm (.0783 - .0791)

### Electrical data

Current rating (at room temp.): max. 20 A with spring force  $\geq$  1,5 N and BeCu plunger (\*\*\* spring force < 1,5 N not recommended for high current applications) R<sub>i</sub> typical:  $< 10 \text{ m}\Omega$ 





## Mechanical data

Working stroke:	4,0 mm (.157)				
Maximum stroke:	5,3 mm (.209)				
for tip styles with diameter $\leq$ 1 mm (.039)					
Maximum stroke:	8,0 mm (.315)				
Spring force at work. st	roke: 1,5 N (5.4oz)				
Alternative:	0,8 N (2.9oz)***;				
2,25 N (8.	1oz); 3,0 N (10.8oz)				



